
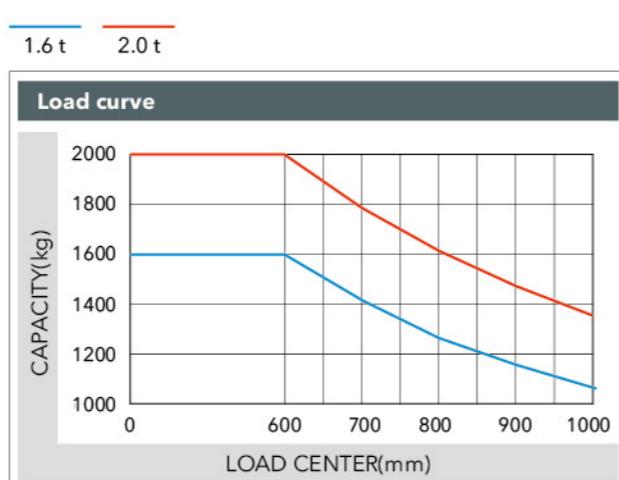


WIDE VIEW FULL FREE 3-STAGE MAST

Mast model	Lifting height (mm) h3		Free lifting height (mm) h2		Mast height, lowered (mm) h1		Load capacity (kg)		Total weight (kg)		Fork tilt angle (front/rear) α/β
	CQD16	CQD20	CQD16	CQD20	CQD16	CQD20	CQD16	CQD20	CQD16	CQD20	
ZSM460	4600	4600	1280	1280	2314	2314	1600	2000	3410	3580	2°/4°
ZSM480	4800	4800	1340	1340	2381	2381	1600	2000	3410	3580	2°/4°
ZSM540	5400	5400	1540	1540	2581	2581	1600	2000	3454	3640	2°/4°
ZSM570	5700	5700	1640	1640	2681	2681	1550	1900	3476	3670	2°/4°
ZSM630	6300	6300	1840	1840	2881	2881	1500	1900	3521	3730	2°/4°
ZSM675	6750	6750	1940	1940	2982	2982	1450	1800	3576	3775	2°/4°
ZSM700	7000	7000	2030	2030	3065	3065	1400	1700	3595	3800	2°/4°
ZSM715	7150	7150	2080	2080	3115	3115	1400	1700	3606	3820	2°/4°
ZSM750	7500	7500	2190	2190	3232	3232	1300	1700	3633	3850	2°/4°
ZSM800	8000	8000	2360	2360	3398	3398	1200	1500	3669	3900	2°/4°
ZSM850	8500	8500	2530	2530	3564	3564	1100	1300	3706	3950	2°/4°
ZSM900	9000	9000	2690	2690	3730	3730	900	1100	3742	4000	2°/4°
ZSM950	9500	9500	2860	2860	3898	3898	800	1000	3780	4050	2°/4°
ZSM1000	-	10000	-	3030	-	4064	-	850	-	4100	2°/4°
ZSM1050	-	10500	-	3190	-	4230	-	800	-	4150	2°/4°
ZSM1080	-	10800	-	3290	-	4330	-	750	-	4180	2°/4°
ZSM1100	-	11000	-	3360	-	4398	-	700	-	4200	2°/4°
ZSM1150	-	11500	-	3530	-	4564	-	650	-	4250	2°/4°
ZSM1200	-	12000	-	3690	-	4730	-	550	-	4300	2°/4°
ZSM1250	-	12500	-	3860	-	4898	-	500	-	4350	2°/4°

WIDE VIEW MAST

Mast model	Lifting height (mm) h3		Free lifting height (mm) h2		Mast height, lowered (mm) h1		Load capacity (kg)		Total weight (kg)		Fork tilt angle (front/rear) α/β
	CQD16	CQD20	CQD16	CQD20	CQD16	CQD20	CQD16	CQD20	CQD16	CQD20	
M290	2900	120	2200	1600	2000	3140	3660	2°/4°			
M320	3200	120	2350	1600	2000	3150	3370	2°/4°			
M360	3600	120	2550	1600	2000	3180	3400	2°/4°			
M380	3800	120	2650	1600	2000	3200	3420	2°/4°			
M400	4000	120	2750	1600	2000	3210	3430	2°/4°			
M420	4200	120	2850	1600	2000	3230	3450	2°/4°			
M440	4400	120	2950	1600	2000	3240	3460	2°/4°			
M460	4600	120	3050	1600	2000	3300	3510	2°/4°			
M500	5000	120	3250	1500	1900	3320	3540	2°/4°			

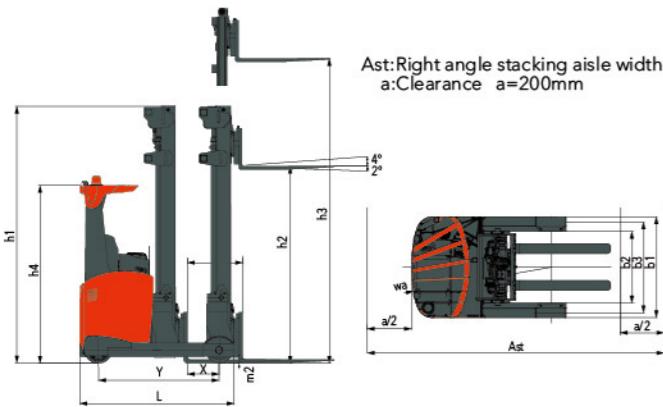


Note: The vertical axis denotes capacity and the horizontal axis denotes load center, which is calculated from front face of fork to centre of load. Standard load is one cubic metre hence 500mm load centre. When tilting forward or using non-standard forks, the capacity will be reduced as load centre is increased.

Renewable energy technologies

With the use of AC controlling renewable energy technologies, the forklift is more energy-saving and the working hour of the battery is extended by 15%.


CHL

The reliable special instrument gives a complete display of the vital information, like operation status, fault detection, etc. It ensures the operator predominate the vehicle status more intuitive and convenient.

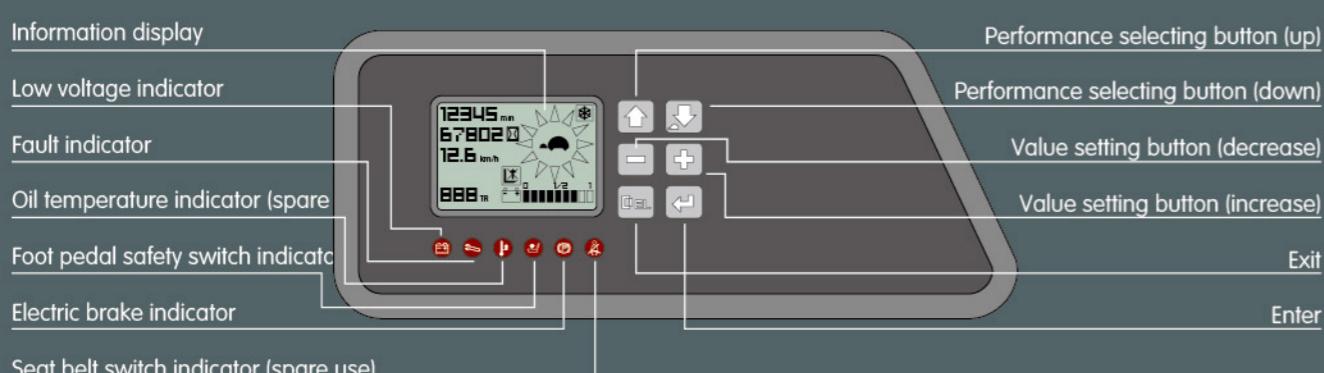
STANDARD CONFIGURATION

AC travelling motor
AC lifting motor
AC steering motor
ZAPI travelling motor controller
ZAPI lifting motor controller
ZAPI steering motor controller
Electromagnetic brake
DC/DC converter
Low noisy gear pump
Control valve (four throw)
4600mm three stage full free lift mast
Integral sideshifter
Standard fork
Backrest
Polyurethane tyre
LED meter
Front working light
Warning light

OPTIONAL DEVICE

Three-stage full free lift mast (other lifting height)
fork with other length
Fork extension
Lifting height pre-selector
Monitoring system
Other battery
Germany hoppecker battery
Italy FAAM battery
Battery charger
Customer made color

Manufacturer's Data and Design Characteristics


Character	ANHUI HELI CO., LTD.	
1.01 Manufacturer	CQD16	CQD20
1.02 Model	GB25	GB25
1.03 Configuration number	Q kg	1600 2000
1.04 Load capacity	C mm	600
1.05 load center distance		Battery
1.06 Power mode		Seated
1.07 Driving mode	Y mm	1450 1515
1.08 Wheel base		Polyurethane
Tyre		1x2
2.01 Tyre type	b3 mm	1157 1143
2.02 Wheels, number front/rear (x=driven wheels)	mm	285x100 330x100
2.03 Track width, rear	mm	343x114 343x114
2.04 Wheel size, rear		
2.05 Wheel size, front		
Size		
3.01 Lift height	h3 mm	4600 4600
3.02 Free lift	h2 mm	1280 1280
3.03 Mast height, lowered	h1 mm	2314 2314
3.04 Fork size:thickness×width×length	s/e/l mm	40x122x1150 40x122x1150
3.05 Fork adjusting width	mm	244-724 244-724
3.06 Fork tilt angle (front/rear)	°	2°/4° 2°/4°
3.07 Fork sideshifting	mm	±75 ±75
3.08 Truck body length (fork excluded)	L mm	1840 1942
3.09 Truck body width	b1 mm	1270 1270
3.10 Distance between support arms	b2 mm	900 900
3.11 Reach distance	L4 mm	606 620
3.12 Height of overhead guard (cab)	h4 mm	2215 2215
3.13 Ground clearance, below mast	m2 mm	75 75
3.14 Turning radius	Wa mm	1689 1751
3.15 Load distance, centre of support arm wheel to face of forks	X mm	369 383
3.16 Aisle width with pallet 1200 x 1200 across forks	Ast mm	2914 2965
3.17 Aisle width with pallet 1000 x 1200 across forks	Ast mm	2760 2810
Performance		
4.01 Travelling speed: with/without load	km/h	11/12 12/14
4.02 Lifting speed: with/without load	m/s	0.34/0.53 0.35/0.55
4.03 Lowering speed: with/without load	m/s	0.5/0.5 0.5/0.5
4.04 Reach speed, with/without load	m/s	0.11/0.11 0.11/0.11
4.05 Maximum climbing ability, with/without load	%	10/15 10/15
Weight		
5.01 Total weight (with battery)	kg	3395 3560
5.02 Axle load, fork outreached, without load, front/rear	kg	1500/1895 1590/1970
5.03 Axle load, fork retracted, without load, front/rear	kg	2013/1383 2230/1330
5.04 Axle load, fork outreached, with load, front/rear	kg	578/4415 550/5010
5.05 Axle load, fork retracted, with load, front/rear	kg	1759/3234 1960/3600
Battery		
6.01 Battery voltage/capacity Ks	V/Ah	48/450 48/560
6.02 Battery weight	kg	750 967
6.03 Battery box dimension	mm	1220x283x784 1220x352x784
Motor and controller	</td	

1.6-2.0t G2 series

AC Electric Reach Truck Sit Down Type (High Efficiency)

G2 series / INTELLIGENT ENVIRONMENT-FRIENDLY

» FEATURES OF THE COMPLETED TRUCK

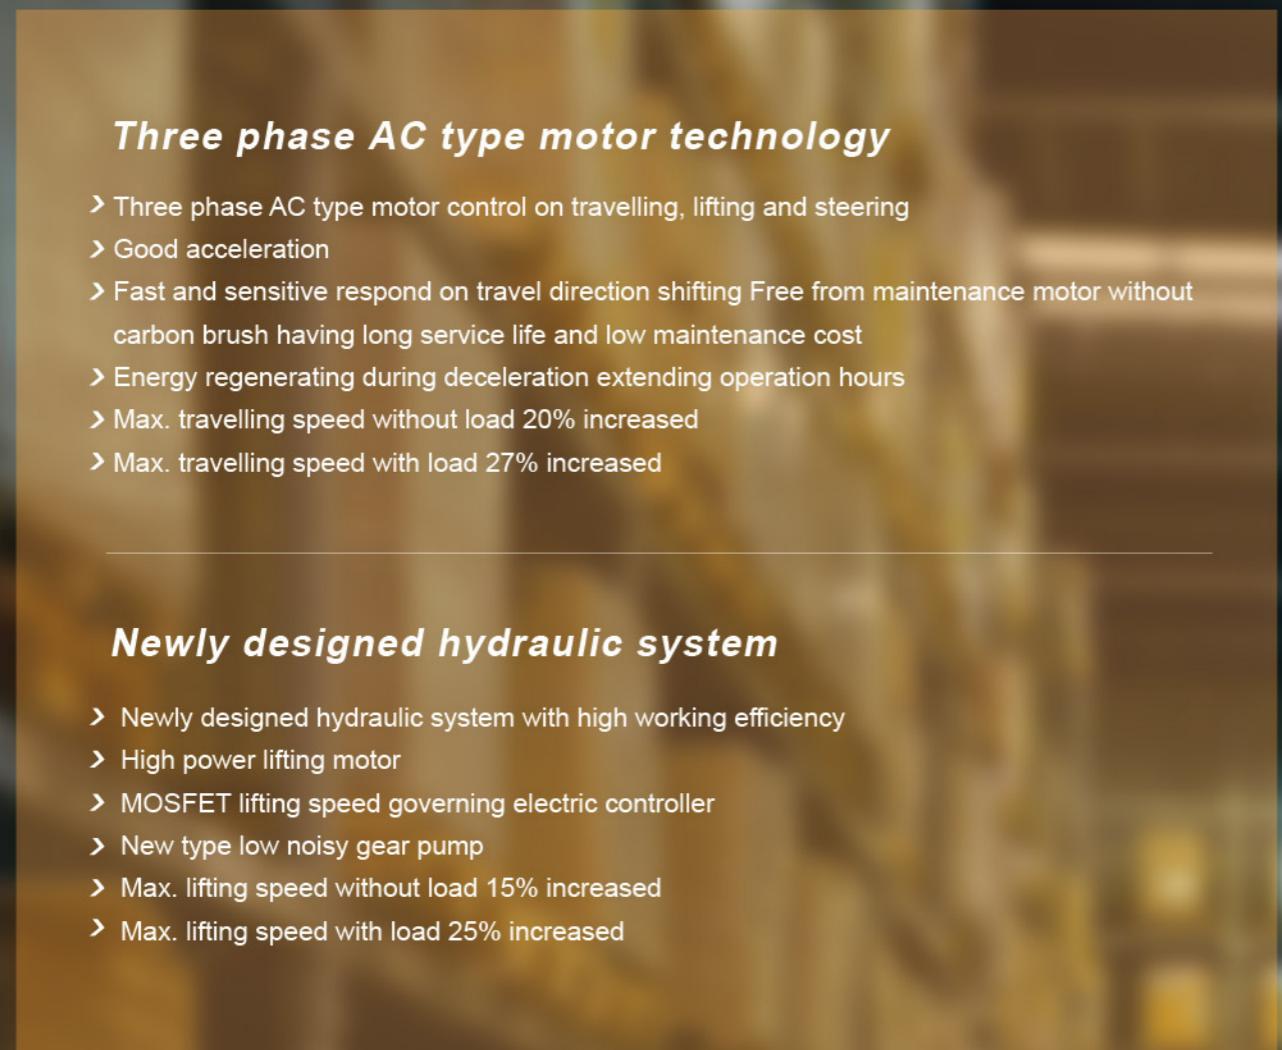

Optimized intelligent design

- > ZAPI travelling motor controller
- > ZAPI lifting motor controller
- > ZAPI steering motor controller
- > CAN bus technology
- > Emergency power off of both main circuit and control circuit
- > Parking brake on slope
- > Operation sequence protection
- > Travelling speed control
- > Electric controller self protection
- > Lifting height pre-selector (optional)

Advanced EPS electric powered steering

- > EPS electric powered steering offering easy, flexible, high efficient and mute operation
- > Steering motor controller
- > Automatic centering function
- > Real-time shifting between 180°steering mode and 360° steering mode
- > Automatic limit on speed and accelerated speed when steering

Easy operated thumb switch

- > To control hydraulic functions
- > Clear operating units
- > Proportional solenoid offering a stable and comfort lowering action



Comfort cab

- > Comfort cab offering driver good working environment and easy operation
- > Easy reach to important operation
- > Adjustable seat (seat position /backrest angle)



Overhead guard

- > Fence on top of the overhead guard offering driver wide view
- > Beveled view angle design with front ring beam meeting humanized requirements